

Overview of HydroLight-EcoLight

Curtis Mobley

Vice President for Science and Senior Scientist
Sequoia Scientific, Inc.
Belleue, WA 98005
curtis.mobley@sequoiasci.com

IOCCG Course
Villefranche-sur-Mer, France
July 2016



Copyright © 2016 by Curtis D. Mobley



HYDROLIGHT OVERVIEW

- What is HydroLight?
 - Physical model
 - Computational model
 - Use as a tool
- Software Package
- I'll do some example runs
- Install the code on your laptops, and you do runs during the next two labs

THE RADIATIVE TRANSFER EQUATION (RTE)

One-dimensional, time-independent, scalar version. For derivation, see www.oceanopticsbook.info/view/radiative_transfer_theory/deriving_the_radiative_transfer_equation

$$\begin{aligned} \cos\theta \frac{dL(z,\theta,\phi,\lambda)}{dz} &= -[a(z,\lambda) + b(z,\lambda)] L(z,\theta,\phi,\lambda) \\ &+ b(z,\lambda) \int_0^{2\pi} \int_0^\pi L(z,\theta',\phi',\lambda) \tilde{\beta}(z,\theta',\phi' \rightarrow \theta,\phi,\lambda) \sin\theta' d\theta' d\phi' \\ &+ S(z,\theta,\phi,\lambda) \end{aligned}$$

Given the IOPs $a(z,\lambda)$, $b(z,\lambda)$, and $\tilde{\beta}(z,\theta',\phi' \rightarrow \theta,\phi,\lambda)$; the internal sources $S(z,\theta,\phi,\lambda)$; and boundary conditions at the air-water surface and the bottom, HydroLight solves for the radiance distribution $L(z,\theta,\phi,\lambda)$.

THE RADIATIVE TRANSFER EQUATION (RTE)


$$\begin{aligned}
 \cos\theta \frac{dL(z,\theta,\phi,\lambda)}{dz} &= -[a(z,\lambda) + b(z,\lambda)] L(z,\theta,\phi,\lambda) \\
 &+ b(z,\lambda) \int_0^{2\pi} \int_0^{\pi} L(z,\theta',\phi',\lambda) \tilde{\beta}(z,\theta',\phi' \rightarrow \theta,\phi,\lambda) \sin\theta' d\theta' d\phi' \\
 &+ S(z,\theta,\phi,\lambda)
 \end{aligned}$$

The diagram consists of three blue arrows originating from a common point at the bottom center. One arrow points to the $a(z,\lambda)$ term in the first term of the equation. Another arrow points to the $b(z,\lambda)$ term in the second term. The third arrow points to the $S(z,\theta,\phi,\lambda)$ term in the third line of the equation.

NOTE: The RTE has the TOTAL absorption and VSF. Only oceanographers (not photons) care how much of the total absorption and scattering is due to water, phytoplankton, CDOM, minerals, etc.

SOLVING THE RTE

A unique solution of the RTE requires:

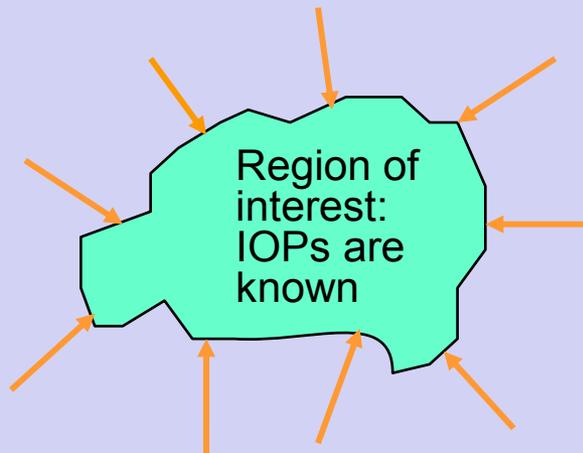


Radiance incident onto all boundaries from outside the region is known

A 3-D problem



Stretch out the region to make a horizontally homogeneous ocean

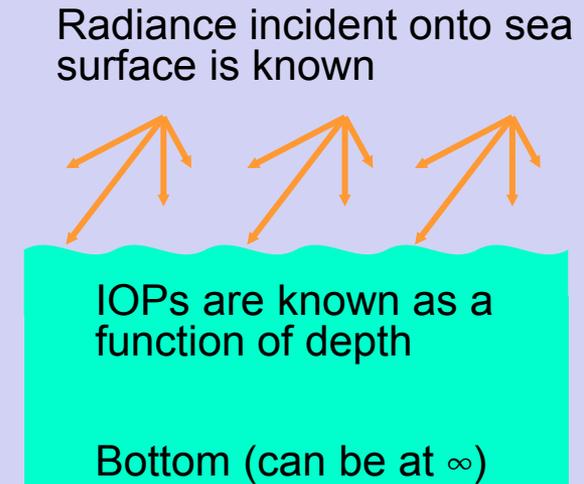

A 1-D problem

PHYSICAL MODEL


- time independent
- one spatial dimension (depth)
 - no restrictions on depth dependence of IOPs (not a “layered” model)
- no restriction on wavelength dependence from 300 to 1000 nm
- arbitrary sky radiance onto sea surface
- Cox-Munk air-water surface (parameterizes gravity & capillary waves via the wind speed)
- various bottom boundary options
- includes all orders of multiple scattering
- includes Raman scatter by water
- includes fluorescence by chlorophyll and CDOM
- includes internal sources (bioluminescing layers)
- polarization not included (the biggest inaccuracy in HydroLight: gives errors in computed radiances of up to ~10%, ~1% in irradiances)
- whitecaps not included

(v. 5.3 allows for any wavelengths — IF you have the needed inputs)

COMPUTATIONAL MODEL

Discretization: Average the RTE over directional “windows” (solid angle “quads”) Ω_{uv} and over wavelength bands $\Delta\lambda_j$, and save output at a finite number of depths z_k

$$L(z, \theta, \phi, \lambda) \rightarrow L(k, u, v, j) = \frac{1}{\Delta\lambda_j \Delta\Omega_{uv}} \int_{\Delta\lambda_j} \int_{\Delta\Omega_{uv}} L(z_k, \theta, \phi, \lambda) \sin \theta \, d\theta \, d\phi \, d\lambda$$

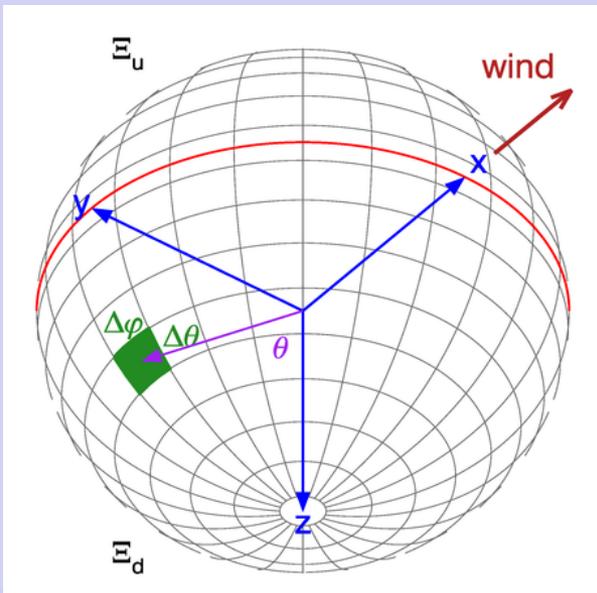

HydroLight computes the directionally averaged radiance within each quad, averaged over the wavelengths within each band. Note: the outputs are still spectral quantities, not quad- or band-integrated values.

Note: All numerical models must discretize continuous functions of depth, direction and wavelength to get a finite number of quantities to be computed.

COMPUTATIONAL ADVANTAGES

- **Run time linearly proportional to optical depth**
 - Monte Carlo $\propto \exp(\text{optical depth})$
- **Run time independent of IOP(z) profile; arbitrary depth resolution**
 - Discrete ordinates \propto number of homogeneous layers
- **Solution includes all orders of multiple scattering**
- **User can/must specify all input**
 - but defaults & examples are built in for everything
- **Graphical user interface for input**
 - not necessary, but makes it easy to define your input
- **Simple analysis of output with printout, Excel, or IDL plots**
 - So you can do even less thinking about your results

USING HYDROLIGHT

- A **research** tool:
Study the connections between the various inputs and outputs of marine light fields in a **controlled environment**.
- An **analysis** tool:
Characterize the ambient light field for interpretation of empirical data.
- A **prediction** tool:
Predict the optical environment associated with a predicted set of biological and geological parameters.
- A **teaching** tool:
Bring radiative transfer theory to the classroom without needing to know advanced mathematics.

FROM THE USERS' GUIDE



...the HydroLight model per se is a radiative transfer model, not a model of oceanic optical properties. You, the user, must supply the inherent optical properties and boundary conditions to the HydroLight core code.

HydroLight does not know the inherent optical properties, or the chlorophyll profile, or the depth, or anything else about the water body you are interested in. *You* must provide this information to HydroLight. The various IOP models, phase functions, chlorophyll data sets, ac-9 data sets, etc. that come with HydroLight are *examples* of how to provide IOP and other information to HydroLight. *You* will need to replace these example routines and data sets with your own, in order to simulate the water body of interest to you.

It is not idiot proof. Garbage in, garbage out.

SUITABLE INPUT


Clean up your data before giving it to H!

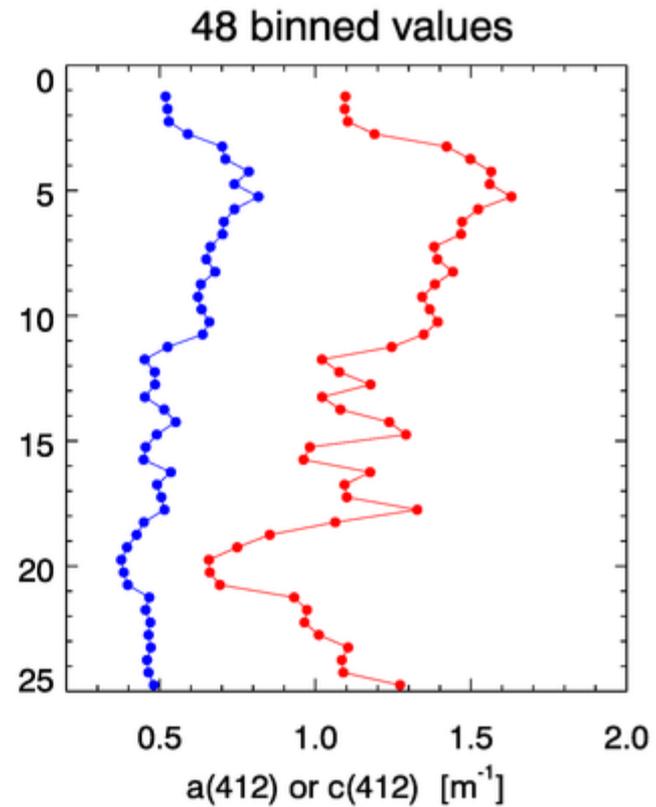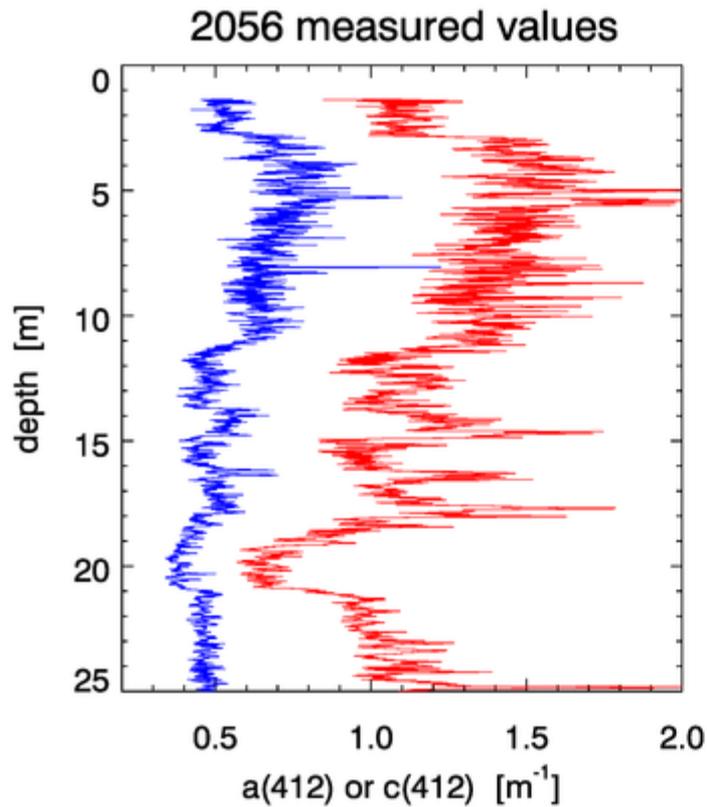


ECOLIGHT COMPUTATIONAL MODEL

Discretization: Average the RTE over azimuthal angle ϕ and over polar angle “bands” (solid angles) Ω_u and over wavelength bands $\Delta\lambda_j$, and save output at a finite number of depths z_k

$$L(z, \theta, \phi, \lambda) \rightarrow L(k, u, j) = \frac{1}{\Delta\lambda_j 2\pi \Delta\Omega_u} \int_{\Delta\lambda_j} \int_0^{2\pi} \int_{\Delta\Omega_u} L(z_k, \theta, \phi, \lambda) \sin\theta \, d\theta \, d\phi \, d\lambda$$

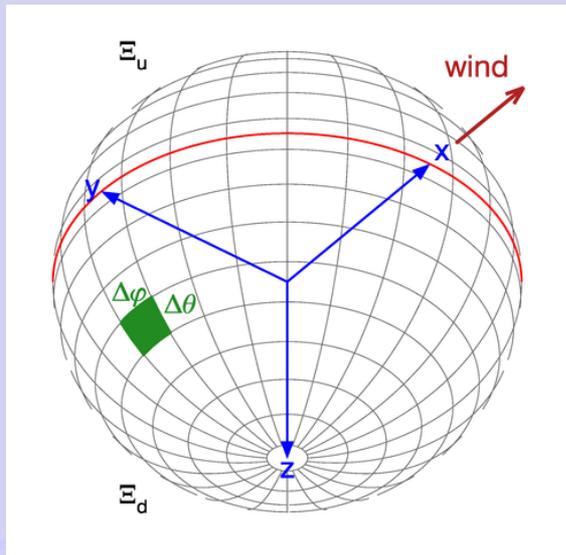

HydroLight quads

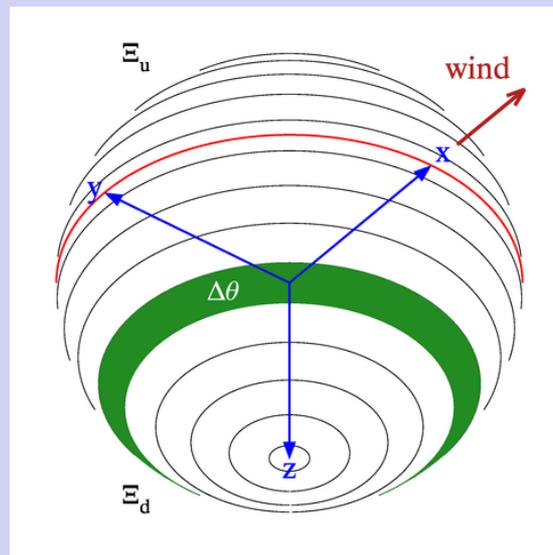

EcoLight bands

EcoLight computes the azimuthally averaged radiance within each solid angle band.

The irradiances and polar cap radiances are the same for H & E.

HYDROLIGHT VS ECOLIGHT

Run time \propto fixed overhead + number of quads or bands squared, so for $N = 20$ θ bands and $M = 24$ ϕ bands (10 deg x 15 deg angular resolution):


$$\text{HL run time} \propto \text{FO} + (NM)^2 = \text{FO} + (20 \cdot 24)^2$$

$$\text{EL run time} \propto \text{FO} + (N)^2 = (20)^2$$

$\text{EL/HL} = [\text{FO} + (20)^2] / [\text{FO} + (20 \cdot 24)^2] \sim 1/100$ so EL \sim 100 times faster (can be \sim 20 to 1000 times faster, depending on the problem and whether other speed optimizations are used)

The inputs to H & E are identical, and the computed irradiances, diffuse attenuation coefs, reflectances, etc. are almost identical (<1% difference due to numerical algorithms). Only H can output the directional structure of the radiance distribution.

SOFTWARE PACKAGE

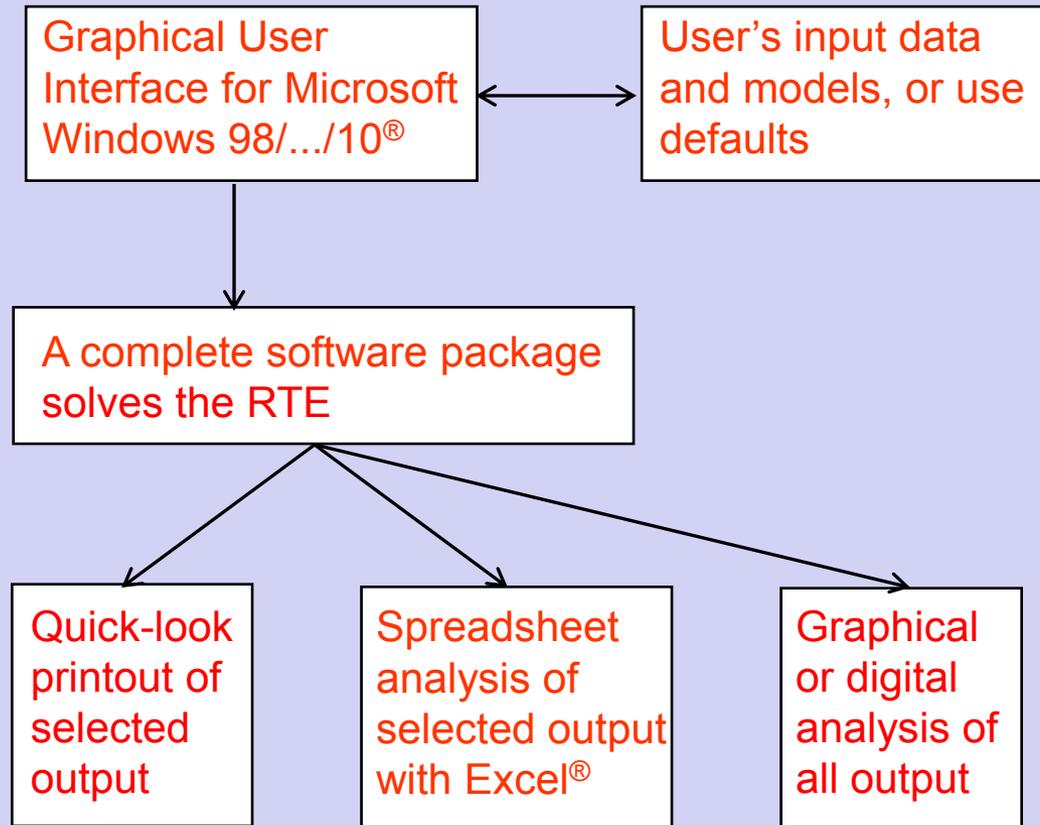

The current release is only for Microsoft Windows. John Hedley has developed Apple and Linux versions, which we would like to test on you.

THE RULES OF THE GAME

I have received no funding for the development and continued improvement of HydroLight (see *HydroLight History*). Just as with instruments, it must pay its own way as a commercial product. HydroLight is a commercial product of Sequoia Scientific, Inc. and is copyrighted code. It is not in the public domain.

The code provided to students for this course is an executable version of HydroLight-EcoLight version 5.2. This code does not have all of the features of the full HE code and does not include the source code.

The code for this class will run for 500 executions or until 31 July 2016, whichever comes first.

Sea Kayaking in SE Greenland, 2005



photo by Curtis Mobley